

# MATERIAL PROPERTY DATA SHEET



## Talon Fabrics™ TF-TB-STAKED

Turbidity Barrier • Sediment Control • Silt Containment



### DESCRIPTION


TF-TB-STAKED turbidity barriers are permeable barriers to restrict sedimentation near bodies of water used with stakes.

#### Material Content

Material Yellow PVC Laminated Polyester Fabric  
(9x9, 1300 Denier polyester scrim)

#### Standard Unit Sizes

Dimensions 44" Depth x 100' Length

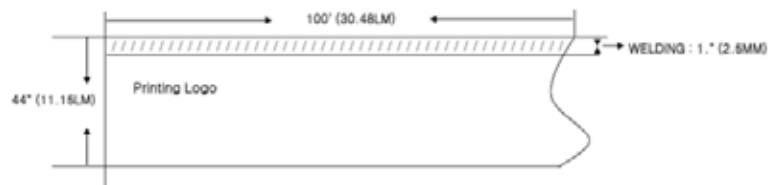

Barrier Part	Standard	Description
Body	PVC Laminated Fabric	Weight: 18 oz/SY (610 g/m <sup>2</sup> ) Grab Tensile: 324 x 271 lb/in Tongue Tear: 100 x 100 lbs/in
Top	Welding	Welding on Top: 1" (25 mm)

Disclaimer: The information contained herein may represent physical properties and expected values for specific tests at the time of manufacture, as part of routine quality analysis and control. While believed correct, and every effort for accuracy has been made, seller makes no warranties, express or implied, as to the accuracy of these values, fitness for a particular application, or compliance with any specification. Western Green and its affiliates make no warranty as to the test results obtained from evaluation of delivered material. This data sheet supersedes all previous versions for the style and is subject to change without notice. For further information, please feel free to contact Western Green.

©2024, Western Green.



Rev. 11.2024

Scan for additional and updated product information

